

Grease and Oil

Tech Data



PURITY™ FG2 SYNTHETIC AND PURITY FG2 SYNTHETIC HEAVY 220 GREASES

Introduction

Petro-Canada's PURITY™ FG2 Synthetic and PURITY FG2 Synthetic Heavy 220 greases are advanced food grade greases specially formulated for the toughest food processing applications. Their advanced chemistry provides outstanding protection against wear and water washout, over a wide range of operating temperatures.


PURITY FG2 Synthetic and PURITY FG2 Synthetic Heavy 220 greases have been designed to meet the highest food industry safety standards and can be easily integrated into HACCP (Hazard Analysis and Critical Control Point) plans and GMP (Good Manufacturing Practice) programs.

Superior Performance Benefits

- **Higher load carrying capability and excellent protection against wear**
 - Excellent extreme pressure (EP) and antiwear (AW) performance
 - Protects gears, bearings and equipment under higher loads
 - Helps to prevent seizure, scuffing and spalling



PURITY FG2 Synthetic delivers equal wear protection to a specialty lubricant suppliers' synthetic food grade grease. Less wear means fewer production upsets, higher productivity and lower maintenance costs.

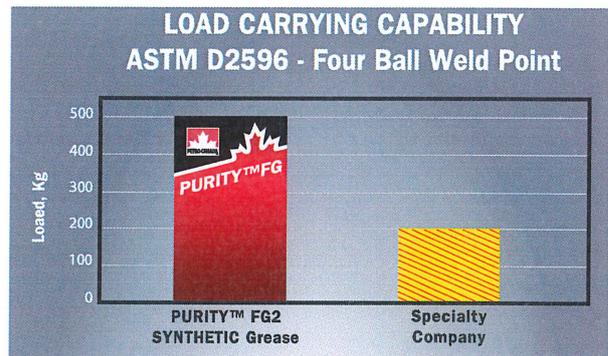

PURITY FG2 Synthetic grease provides higher load carrying capability than a specialty lubricant suppliers' synthetic food grade grease, so it's ideal for food processing applications running under heavier loads.

- **Strong resistance to lubricant breakdown and water washout in harsh operating environments**
 - Maintains consistency and lubrication in the presence of water, food acids, juices and by-products
 - Does not run from bearings under steam cleaning
 - Highly resistant to water washout and most sterilizing chemicals used in cleaning

- **Effective across a wide range of temperature extremes**
 - Normal operating range from:
 - Purity FG2 Synthetic: -40°C/-40°F to 200°C/392°F.
 - Purity FG2 Synthetic Heavy 220: -35°C/-31°F to 200°C/392°F.
 - Purity FG2 Synthetic pumpable down to -35 °C/-31 °F. Purity FG2 Synthetic Heavy 220 pumpable down to -25 °C/.
 - Can be used intermittently as high as 250°C (482°F)
 - Ideal for heavily loaded bearings operating under wide temperature swings

- **Zinc Free**

Applications

PURITY FG2 Synthetic and PURITY FG2 Synthetic Heavy 220 greases are recommended as multipurpose lubricants across all food processing applications such as freezers, high temperature applications including ovens, multi service bearings, canning, Bottling Equipment, and Mixers.

They are especially effective in food plant applications running under heavy loads, or subject to high and low temperature extremes. Purity FG2 Synthetic is particularly recommended for use in low temperature applications. Purity FG2 Synthetic 220 Heavy is most suitable for use under heavy loads, and where greases need to stay in place.

More Performance Advantages

- **Excellent oxidation resistance extends grease life**
 - Performance life is typically increased by up to 2 times that of regular mineral oil based grease
- **Highly effective protection against rust and corrosion**
 - Prolongs component life and guards against unplanned downtime
- **Tasteless, odourless and non-staining**
 - *Tackified to stay in place Purity FG2 Synthetic Heavy 220 is formulated with tackifiers to keep it in place under the most demanding circumstances.

Food Grade Approved

- **Fully registered for use in and around food processing operations**
 - H1 registered by NSF
 - All components comply with FDA 21 CFR 178.3570 Lubricants with incidental food contact
 - Certified Kosher Pareve
 - Certified Halal



Nonfood Compounds
Program Listed H1



- For a complete list of PURITY FG credentials, consult a Petro-Canada Lubricants Representative

Typical Performance Data

PROPERTY	TEST METHOD	PURITY FG2 SYNTHETIC	PURITY FG2 SYNTHETIC HEAVY 220
NLGI Grade	-	2	
Grease Type	-	Calcium Sulfonate / Carbonate Complex	Calcium Sulfonate / Carbonate Complex
Penetration, Unworked	ASTM D217	296	296
Worked 60 strokes	ASTM D217	294	293
Worked, Change after 10,000 strokes	ASTM D217	+11	-5
Colour	-	Tan	Tan
Dropping Point, °C / °F	ASTM D2265	304 / 579	304 / 579
Water Washout, % loss @ 79°C / 174°F	ASTM D1264	0.0	0.0
Wear Protection:			
Timken, kg / lb	ASTM D2509	27 / 60	27 / 60
Four Ball Wear, scar diam (mm)	ASTM D2266	0.42	0.49
Four Ball Weld, kg	ASTM D2596	500	315
Load Wear Index	ASTM D2596	52.7	30.8
Corrosion Protection:			
Copper Corrosion	ASTM D4048	1B	1B
Bearing Corrosion	ASTM D1743	Pass	Pass
Oxidation Stability:			
Pressure drop after 100 hours, psi (kPa)	ASTM D942	1.0 (7.0)	1.0 (7.0)
Base Oil Viscosity:			
cSt @ 40°C / SUS @ 100°F	ASTM D445	50 / 233	220 / 1140
cSt @ 100°C / SUS @ 210°F	ASTM D445	7.8 / 52	24 / 119
Operating Temperature Range:			
normal operation		-40°C to 200°C / -40°F to 392°F	-35°C to 200°C / -31°F to 392°F
short transient periods		up to 250°C / 482°F	up to 250°C / 482°F

The values quoted above are typical of normal production. They do not constitute a specification.

To order product or to learn more about how Petro-Canada Lubricants
can help your business visit: lubricants.petro-canada.com
or contact us at: lubecsr@petrocanadalsp.com



IM-8025E (2016.08)

™ Owned or used under license.



Beyond today's standards.™

LUBRICANTS



October 8, 2004

Mr. Michael L. Paulson
NCH CORPORATION
2727 CHEMSEARCH BLVD.
IRVING, TX 75062
UNITED STATES

RE: UN-LOK 2000 (brush top)
Category Code: H1
NSF Registration No. 135079

Dear Mr. Michael L. Paulson:

NSF has processed the application for Registration of **UN-LOK 2000 (brush top)** to the NSF Registration Guidelines for Proprietary Substances and Nonfood Compounds (2004), which are available at <http://www.nsf.org>. The NSF Nonfood Compounds Registration Program is a continuation of the USDA product approval and listing program, which is based on meeting regulatory requirements including FDA 21 CFR for appropriate use, ingredient and labeling.

This product is acceptable as a lubricant with incidental food contact (H1) for use in and around food processing areas. Such compounds may be used on food processing equipment as a protective anti-rust film, as a release agent on gaskets or seals of tank closures, and as a lubricant for machine parts and equipment in locations in which there is a potential exposure of the lubricated part to food. The amount used should be the minimum required to accomplish the desired technical effect on the equipment. If used as an anti-rust film, the compound must be removed from the equipment surface by washing or wiping, as required to leave the surface effectively free of any substance which could be transferred to food being processed.

NSF Registration of this product is current when the NSF Registration Number, Category Code, and Registration Mark appear on the NSF-approved product label, and the registered product name is included in the current NSF White Book Listing of Nonfood Compounds at the NSF website (<http://www.nsf.org>). The NSF Registration Mark can be downloaded from the NSF website, at [http://www.nsf.org/business/about NSF/nsf marks download.asp](http://www.nsf.org/business/about_NSF/nsf_marks_download.asp).

NSF Listing of all registered Nonfood compounds by NSF International is not an endorsement of those compounds, or of any performance or efficacy claims made by the manufacturer.

Registration status may be verified at any time via the NSF web site, at <http://www.nsf.org>. Changes in formulation or label, without the prior written consent of NSF, will void registration, and will supersede the on-line listing.

Sincerely,

A handwritten signature in black ink, appearing to read 'Carmen Grindatti', written in a cursive style.

Carmen Grindatti
NSF Nonfood Compounds Registration Program

Company No: N10861

SAFETY DATA SHEET UN LOK 2000

According to EC Regulation 1907/2006/EC - revision 2015/830

Print Date 29/01/2019

Creation Date 02/02/2015

Revision No. 3.2
Revision Date 21/01/2019

SECTION 1. IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

1.1. Product identifier

Product Name UN LOK 2000
Product Code 11000713U2 (CLP)

1.2. Relevant identified uses of the substance or mixture and uses advised against

Recommended use
Lubricant.

1.3. Details of the supplier of the safety data sheet

NCH UK & Ireland, NCH House, Springvale Avenue, Bilston, WV14 0QL Tel (UK): 01902 510200, Tel (Ireland): 042 939 5502
E-mail address technical_uk@nch.com
Website address www.ncheurope.com

1.4. Emergency telephone number

UK - 01902 510200 (available during Office Hours)
In Republic of Ireland (available from 8am to 10pm daily): 01 809 2166

SECTION 2. HAZARDS IDENTIFICATION

2.1. Classification of the substance or mixture

Classification according to Regulation (EC) No 1272/2008 (CLP/GHS) and its adaptations
Aquatic chronic: Category 2
H411 - Toxic to aquatic life with long lasting effects

2.2. Label elements

Labelling according to Regulation (EC) No 1272/2008 (CLP/GHS)

Hazard pictograms



Hazard Statements

H411 - Toxic to aquatic life with long lasting effects

Precautionary Statements

P273 - Avoid release to the environment

P391 - Collect spillage

For industrial and institutional use only.

Keep out of reach of children.

2.3. Other hazards

No additional hazards identified.

The components in this formulation do not meet the criteria for classification as PBT or vPvB. As defined under the regulation EC 1907/2006.

SECTION 3. COMPOSITION / INFORMATION OF INGREDIENTS

3.2 Mixture

Chemical Name	CAS-No.	EC No.	EU - REACH reg number	Weight-%	EU - GHS/CLP Classification	Notes
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	8042-47-5	232-455-8	01-2119487078-27	50 - 100	-	
CALCIUM CARBONATE	471-34-1	207-439-9	01-2119486795-18	25 - < 50	-	
ZINC OXIDE	1314-13-2	215-222-5	01-2119463881-32	10 - < 20	Aquatic Acute 1 (H400) Aquatic Chronic 1 (H410)	

This mixture contains substances with a Community workplace exposure limit. For any H statements mentioned in this section, see the full text in section 16.

SECTION 4. FIRST AID MEASURES**4.1. Description of first aid measures****General advice**

Get medical attention immediately if symptoms occur.

Eye Contact

In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation develops and persists.

Skin Contact

Wash off immediately with soap and plenty of water removing all contaminated clothes and shoes. Do not use solvents or thinners. If skin irritation persists, call a physician. Get medical attention if irritation develops and persists.

Ingestion

Do NOT induce vomiting. Rinse mouth with water. If swallowed, seek medical advice immediately and show this container or label.

4.2. Most important symptoms and effects, both acute and delayed**Sensitisation**

No information available.

Eye contact

May cause irritation as itching and redness.

Skin contact

May cause irritation as itching or redness.

4.3. Indication of any immediate medical attention and special treatment needed**Notes to physician**

Treat symptomatically.

SECTION 5. FIRE-FIGHTING MEASURES**5.1. Extinguishing media****Suitable Extinguishing Media**

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. Use: Foam. Carbon dioxide (CO2). Dry powder. Water spray. Alcohol-resistant foam.

Extinguishing media which must not be used for safety reasons

Water jet.

5.2. Special hazards arising from the substance or mixture

Thermal decomposition can lead to release of irritating gases and vapours. Possibility of harm to the aquatic life. Avoid release into the environment.

5.3. Advice for firefighters

Firefighters should wear a self-contained breathing apparatus and full protective gear.

SECTION 6. ACCIDENTAL RELEASE MEASURES**6.1. Personal precautions, protective equipment and emergency procedures**

Avoid contact with skin, eyes, and clothing. Use personal protective equipment. Refer to protective measures listed in sections 7 and 8. Prevent further leakage or spillage if safe to do so. Material can create slippery conditions.

6.2. Environmental precautions

Prevent product from entering drains. Prevent further leakage or spillage if safe to do so. Insoluble in water and hence will float on the surface. Local authorities should be advised if significant spillages cannot be contained.

6.3. Methods and material for containment and cleaning up**Methods for Containment**

Contain spillage, soak up with non-combustable absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and transfer to a container for disposal according to local / national regulations (see section 13). If using a cloth to wipe up a small spillage, properly dispose of the used cloth to avoid a fire risk.

Methods for Cleaning up

Clean preferably with a detergent, do not use solvents.

6.4. Reference to other sections

Refer to sections 7, 8 and 13.

SECTION 7. HANDLING AND STORAGE**7.1. Precautions for safe handling**

Avoid contact with skin, eyes and clothing. Avoid breathing vapours or mists. Do not eat, drink or smoke when using this product. Ensure adequate ventilation.

7.2. Conditions for safe storage, including any incompatibilities

Keep containers tightly closed in a dry, cool and well-ventilated place. Store in original container.

7.3. Specific end use(s)

No information available.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1. Control parameters**Exposure limits

TWA (8hrs): 5mg/m³ / STEL(15mins):10mg/m³. If vapours, fumes or mists are generated, their concentration in the workplace area should be kept to the lowest reasonable level. For substances.

Chemical Name	European Union	The United Kingdom	France	Germany	Austria
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL				Peak: 20mg/m ³ TWA: 5mg/m ³	
CALCIUM CARBONATE		STEL: 30 mg/m ³ STEL: 12 mg/m ³ TWA: 10 mg/m ³ TWA: 4 mg/m ³	TWA: 10 mg/m ³		
ZINC OXIDE			TWA: 5 mg/m ³ TWA: 10 mg/m ³	Peak: 2mg/m ³ Peak: 0.4mg/m ³ Peak: 4mg/m ³ TWA: 1mg/m ³ TWA: 0.1mg/m ³ TWA: 2mg/m ³	TWA: 5 mg/m ³

Chemical Name	Spain	Portugal	Italy	The Netherlands	Switzerland
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	STEL: 10 mg/m ³ TWA: 5 mg/m ³	STEL: 10 mg/m ³ TWA: 5 mg/m ³			
CALCIUM CARBONATE		TWA: 10 mg/m ³			TWA: 3 mg/m ³
ZINC OXIDE	STEL: 10 mg/m ³ TWA: 2 mg/m ³	STEL: 10 mg/m ³ TWA: 2 mg/m ³			STEL: 3 mg/m ³ STEL: 4 mg/m ³ TWA: 3 mg/m ³ TWA: 0.1 mg/m ³ TWA: 2 mg/m ³

Chemical Name	Denmark	Finland	Norway	Sweden	Czech
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL			TWA: 1 mg/m ³		PEL: 5mg/m ³ NPK-P: 10mg/m ³
CALCIUM CARBONATE					PEL: 10.0mg/m ³
ZINC OXIDE	TWA: 4 mg/m ³	TWA: 2 mg/m ³ STEL: 10 mg/m ³	TWA: 5 mg/m ³	5 mg/m ³ total dust	PEL: 2mg/m ³ NPK-P: 5mg/m ³

Chemical Name	Poland	Ireland
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	NDS: 5 mg/m ³	
CALCIUM CARBONATE	NDS: 10 mg/m ³	
ZINC OXIDE	NDSch: 10 mg/m ³ NDS: 5 mg/m ³	TWA: 2 mg/m ³ STEL: 10 mg/m ³

8.2. Exposure controlsEngineering Measures

Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Use personal protection equipment as per Directive 89/686/EEC.

Respiratory Protection

If excessive mist formation is likely wear suitable respiratory protection. Conforming to EN 143 eg P2 / P3 Particle filters.

Hand Protection

Wear suitable protective gloves conforming to EN 374. Type of gloves suggested : Neoprene gloves (0.4 mm). Nitrile rubber (0.4 mm). Solvent-resistant gloves (butyl-rubber). For break through times, refer to glove manufacturers recommendations.

Eye Protection

Safety glasses if the method of use presents the likelihood of eye contact. Approved to EN 166.

General hygiene considerations

Do not eat, drink or smoke when using this product. Handle in accordance with good industrial hygiene and safety practise. Wash hands before breaks and at the end of workday.

Environmental exposure controls

Local authorities should be advised if significant spillages cannot be contained.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES**9.1. Information on basic physical and chemical properties**

Information below relates to typical values and does not constitute a specification.

Appearance	White	Specific Gravity	0.95
Physical State	Grease	Solubility	Insoluble in water
Odour	Hydrocarbon	Autoignition Temperature	> 280 °C
pH	Not applicable.	Viscosity	Viscous
Melting Point/Range	No information available.	Explosive properties	No information available
Boiling Point/Range	> 250 °C	Oxidizing Properties	No information available.
Flash Point	> 200 °C	VOC Content (%)	0 %
Method	Closed cup		
Evaporation Rate	No information available.		
Flammability Limits in Air %	No information available.		
Vapor Pressure	No information available.		
Vapor Density	No information available.		

9.2. Other information

No other information available

SECTION 10. STABILITY AND REACTIVITY**10.1. Reactivity**

Not considered as highly reactive. See further information below.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

The mixture itself will not dangerously react or polymerise to create hazardous conditions in normal use.

10.4. Conditions to avoid

No conditions to be specially mentioned.

10.5. Incompatible materials

Strong oxidising agents.

10.6. Hazardous decomposition products

None under normal storage conditions and use.

SECTION 11. TOXICOLOGICAL INFORMATION**11.1. Information on toxicological effects**Product Information

The product itself has not been tested.

Chemical Name	LD50 Oral	LD50 Dermal	LC50 Inhalation
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	> 5000 mg/kg (Rat)		= 2062 ppm (Rat) 4 h
CALCIUM CARBONATE	= 6450 mg/kg (Rat)		
ZINC OXIDE	> 5000 mg/kg (Rat)		

Sensitisation

No information available.

Skin contact

May cause irritation as itching or redness.

Eye contact

May cause irritation as itching and redness.

Carcinogenicity

There are no known carcinogenic substances in this product.

Mutagenic Effects

There are no known mutagenic substances in this product.

Reproductive Effects

There are no known substances in this product with effects on reproduction.

SECTION 12. ECOLOGICAL INFORMATION**12.1. Toxicity**Product Information

The product itself has not been tested.

Ecotoxicity effects

Contains substance(s) known to be hazardous to the aquatic environment.

Chemical Name	Toxicity to Fish	Water Flea	Toxicity to Algae
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	LC50 > 10000 mg/L Lepomis macrochirus 96 h		
ZINC OXIDE	LC50 = 0.14 mg/L	EC50 = 0.07 mg/L	EC50 = 0.14 mg/L

12.2. Persistence and degradability

Persistence and degradability are substance specific, no test data is available on the constituents of this mixture to degrade or persist in the environment, either through biodegradation or other processes, such as oxidation or hydrolysis.

12.3. Bioaccumulative potential

Component information below.

Chemical Name	log Pow
VERY HIGHLY REFINED HYDROCARBON MINERAL OIL	6.006

12.4. Mobility in soil

The product is insoluble and floats on water.

12.5. Results of PBT and vPvB assessment

The components in this formulation do not meet the criteria for classification as PBT or vPvB. As defined under the regulation EC 1907/2006.

12.6. Other adverse effects

No data available.

SECTION 13. DISPOSAL CONSIDERATIONS

13.1. Waste treatment methods

Waste from Residues / Unused Products

Dispose of in accordance with local regulations.

Contaminated Packaging

Empty containers should be taken for local recycling, recovery or waste disposal. Empty remaining contents. Recycle according to official regulations.

EWC waste disposal No

The following EWC/ AVV waste codes may be applicable:

13 02 05* Mineral-based non-chlorinated engine, gear and lubricating oils

Other Information

According to the European Waste Catalogue, Waste Codes are not product specific, but application specific

SECTION 14. TRANSPORT INFORMATION

14.1, 14.2, 14.3, 14.4.

IMDG/IMO

UN Number	UN3082
UN proper shipping name	Environmentally hazardous substance, liquid, n.o.s.
Hazard Class	9
Packing Group	III
EmS	F-A, S-F

ADR / RID

UN-No	UN3082
Hazard Class	9
Packing Group	III
Classification Code	M6
Limited Quantity	5 L
Transport Cat. (Tunnel Restriction Code)	3 (E)

IATA/ICAO

UN-No	UN3082
Proper Shipping Name	Environmentally hazardous substance, liquid, n.o.s
Hazard Class	9
Packing Group	III
ERG Code	9L
Shipping Description	UN3082, Environmentally hazardous substance, liquid, n.o.s, 9, PG III

14.5. Environmental hazards

The mixture is environmentally hazardous for transport

Product is a marine pollutant according to the criteria set by IMDG/IMO

14.6. Special precautions for user

No special precautions.

14.7. Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code

Packaged product, not typically transported in IBC's.

Additional information

The above information is based on latest transport regulations i.e. ADR for road, RID for rail, IMDG for sea and ICAO/IATA for air transport.

SECTION 15. REGULATORY INFORMATION**15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture**

This mixture was classified in compliance with EC Regulation 1272/2008 (CLP) and its adaptations.

..

15.2. Chemical safety assessment

No chemical safety assessment has been carried out for this mixture by the supplier

SECTION 16. OTHER INFORMATION**Text of H statements mentioned in Section 3**

H400 - Very toxic to aquatic life. H410 - Very toxic to aquatic life with long lasting effects.

Classification and procedure used to derive the classification for mixtures according to Regulation (EC) 1272/2008 [CLP]

Summation method. H411 - Toxic to aquatic life with long lasting effects.

Prepared By Austen Pimm

Creation Date 02/02/2015

Revision Date 21/01/2019

Revision summary

CLP update. SDS sections updated 2 15 3 16

Abbreviations

REACH: Registration Evaluation Authorisation Restriction of Chemicals

EU: European Union

EC: European community

EEC: European Economic Community

UN: United Nations

CAS: Chemical Abstracts Service

PBT: Persistent Bioaccumulative Toxic

vPvB: very Persistent very Bioaccumulative

LC50: Lethal concentration, 50 percent

LD50: Lethal dose, 50 percent

EC50: Effective concentration, 50 percent

LogPow: LogP octanol/water

VwVwS: Verwaltungsvorschrift wassergefährdende Stoffe (Administrative order relating to substances hazardous to water - Germany)

WGK: Wassergefährdungsklasse (Water Hazard Class - Germany).

AVV: Abfallverzeichnis-Verordnung (Waste Code - Germany)

ADR: Accord européen relatif au transport international des marchandises Dangereuses par Route (European agreement governing the international carriage of dangerous goods by road)

IMDG: International Maritime Dangerous Goods

IATA: International Air Transport Association

ICAO: International Civil Aviation Organisation

RID: Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations concerning the International carriage of Dangerous goods by rail)

EmS: Emergency Response Procedures for Ships Carrying Dangerous Goods

ERG: Emergency Response Guidebook

IUCLID / RTECS International Uniform Chemical Information Database / Registry of Toxic Effects of Chemical Substances

GHS: Globally Harmonised System of classification and Labelling of Chemicals

EINECS: European Inventory of Existing Commercial Chemical Substances

VOC: Volatile Organic Chemical

w/w: weight for weight

DMSO: Dimethyl sulphoxide

OECD: Organization for Economic Cooperation and Development

STEL: Short Term Exposure Limit

TWA: Time Weighted Average

Further Information

Component test results displayed in sections 11 and 12 are typically supplied by Chemadvisor and assembled from publicly available literature sources e.g. IUCLID / RTECS

It is at all times the responsibility of the user to take all necessary measures to comply with legal requirements and local regulations

Disclaimer

The information provided on this SDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of Safety Data Sheet